



External PCIe Modules

Automate hot-plug, dual redundancy and fault injection testing for external PCIe interfaces

Quarch
Data Sheet



External PCIe Modules

Automate hot-plug, dual redundancy and fault injection testing for external PCIe interfaces



Highlights

- Supports multi lane PCIe devices
- Removes manual intervention, for fully automated testing
- Precise and consistent timing control over hot-swap scenarios
- Completely transparent at the protocol layer
- Create and test many different fault conditions
- Simple to control with your existing test automation system

Use Cases

System Qualification	Run repeated test cycles with bounds testing of all possible hot-swap and lane width scenarios
Regression Testing	Automated regression tests spot issues earlier during development
RAID Testing	Force drive rebuilds, single/double RAID faults
Failover Testing	Test dual redundancy, fault monitoring and performance during a failure
Fault Injection	Simulate a large number of fault scenarios





Hot Swap

PCIe data is switched with high speed RF switches, ensuring that our modules are almost totally transparent to the storage system. Host/Device connections will appear as if they are directly attached.

Individual control over each pin allows us to create almost any possible hot-swap or fault scenario. Precise timing ensures that every test can be exactly re-created. Versions are available with inrush current limits, to help high power devices hot-plug on hosts with limited power supply capacity.

The modules can be manually controlled for bench testing, or easily integrated into your existing test automation system as part of a fully automated test solution.

Module Range

Currently the external PCIe range is limited to devices compatible with the "PCI Express External Cabling Specification Revision 3.0" and OCulink

Modules have individual control over every power, sideband and PCIe data signal.

For PCIe External Cables which have dual EEPROMs and which can communicate via a side-channel, we supply an 0.5m custom cable with each module. This has every pin directly connected, so our module will be totally transparent to the link

Interface options depend on the controller you chose, but include simple Serial, USB and LAN options. These can be accessed from almost any scripting language. You will need to purchase a separate controller to use this module.

These modules can be combined with other Torridon modules as part of a full test-automation system.

Supplied Parts

- Drive Module**
- The main unit: Comes with a fixed 40cm Interface Cable to connect to a Torridon Controller.
 - QTL2058 Is also supplied with an 0.5m custom cable for use on one side of the link, to ensure it is transparent to the cable EEPROMs

Also Required

- Controller**
- You will require one slot on a Torridon Controller for each Cable Module

- Downloads**
- Our website contains many useful downloads to help you get started: www.quarch.com

USB Drivers
Technical Manuals
Quick Start Guides
Example Scripts
TestMonkey GUI





Support

Quarch provides direct support to all customers, regardless of the sales channel you use to purchase our equipment. We are available over email, or by phone during UK office hours. Our regional partners are also trained to handle many of the most common questions you might have.

Our support is normally free, though there may be charges if you require on-site training or significant development work. Please contact us if there is anything we can do to help.

Please see our website for access to drivers, technical manuals, quick-start guides, example scripts and more.

Email	Phone	Web
support@quarch.com	+44 1343 508 140	www.quarch.com/support

Ordering

Quarch have a network of specialist partners around the world. Please contact our partner in your region if you require a quote.

We recommend evaluating our products before purchase, so our partners will be happy to arrange a free evaluation unit.

Regional Contact Details

North America

SerialCables LLC
Colorado, California



Email sales@serialcables.com
Web www.serialcables.com
Phone +1 303-495-2320

China, Hong Kong

Saniffer
Hong Kong



Email sales@saniffer.com
Web www.saniffer.com
Phone +86 21-58480285

India

ESA Group
Bangalore



Email quarchsales@esaindia.com
Web www.esaindia.com
Phone +91 80-67648888

Taiwan

Reeper Technology
Taipei



Email iron_lu@reeper.com.tw
Web www.reeper.com.tw/
Phone +886 2 8970 7075

Israel

EMY-Tech
Misgav



Email info@emy-tech.com
Web www.emy-tech.com
Phone + 972-4-9909-130

Europe and ROW

Quarch Technology
Scotland, UK




Email sales@quarch.com / support@quarch.com
Web www.quarch.com
Phone +44 1343-508-140





Products Versions

Product Code	Product Options
QTLXXXX	Product code, made up from options below
QTL2058	GEN3 External PCIe Cable Module with 0.5m Custom Cable
QTL2341	GEN4 External PCIe Cable Module with 0.5m Custom Cable
QTL2146	OCulink Cable Module
QTL2117	GEN4 PCIe x4 Slimline Cable Module (Due 2020 Q1)

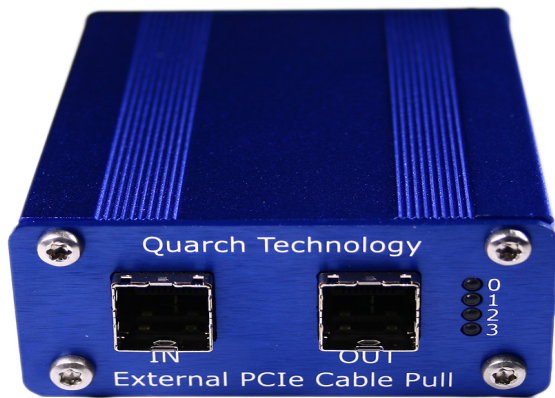

External PCIe Cable Module - Main Unit



**Required Controllers** - One port on a controller is required for each module

Product Code	Description	
QTL1260	Torridon Interface Kit Simple USB and Serial control options for bench testing	
QTL1461	4 Port Torridon Controller Control up to 4 modules via Serial/LAN/USB connection	
QTL1079	28 Port Torridon Controller Control up to 28 modules via Serial, LAN or USB connection	

Accessories

Product Code	Description
QTL1558	40cm Torridon Double Ended Interface Cable (Female to Female) Replacement cable for Card Modules, connects Module to Controller
QTL1870	100cm Torridon Double Ended Interface Cable (Female to Female) Replacement cable for Card Modules, connects Module to Controller
QTL1381	100cm Torridon Extension Cable (Male to Female) Extends an existing Double Ended Torridon cable or fixed Drive Module Cable





Technical Information

Connections	QTL2058	QTL2146	QTL2341	QTL2117
Host Side Connector	External PCIe	OCulink Internal	External PCIe	Slimline x4
Device Side Connector	External PCIe	OCulink Internal	External PCIe	Slimline x4
Max Speed	8GT/s	8GT/s, 16GT/s ²	16GT/s	
Protocols	PCIe			
Signals Switched	All ¹			

¹ All power, high speed data, mated and sideband pins are individually switched. GND pins are directly routed through the module.

² Designed for, but not tested at GEN4 speeds, as equipment is not available yet

External Connections	QTL2058	QTL2146	QTL2341	QTL2117
Power Supply	Via Torridon Controller			
Control Ports	Torridon Connector			
Triggering	X	X	X	X
Power Injection Port	√	√	X	X

Physical Dimensions	QTL2058	QTL2146	QTL2341	QTL2117
Length	84mm			
Width	63.5mm			
Height	30mm			

Features	QTL2058	QTL2146	QTL2341	QTL2117
Basic (power only) hot/swap	√	√	√	√
Full hot-swap	√	√	√	√
Pin Bounce Simulation	Simple/Custom. 10uS minimum period		Simple/Custom. 1uS minimum period	
Signal Glitch	Single/Cycle/PRBS. 50nS minimum length			
Voltage Monitoring	X	√	X	X
Sideband Monitoring	X	X	√	√
Active Signal Driving	X	X	√	√

Controllers	All Modules
Serial Control	Supported on all Controllers
USB Control	Supported on all Controllers
REST Control	Supported on QTL1079 and QTL1461
Telnet Control	Supported on QTL1079 and QTL1461



